

COSINUS SLIDE® SEALED JOINT

FOR OUTSIDE & INSIDE APPLICATIONS



NO DIRT



NO RUST




NO DEFLECTION




NO SHOCKING
& VIBRATION




VALUE FOR THE CUSTOMER




INHOUSE CALCULATIONS

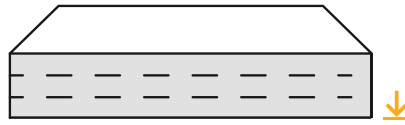


OPTIMIZE FLOOR THICKNESS WITH A FREE DESIGN CHECK

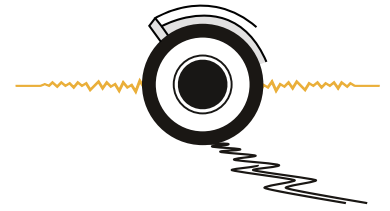


SHOCK AND VIBRATION FREE

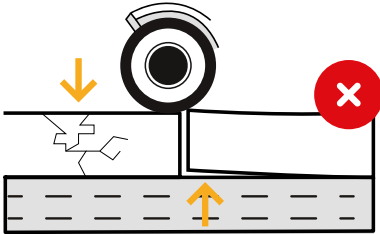


NO DEFLECTION AND NO CURLING

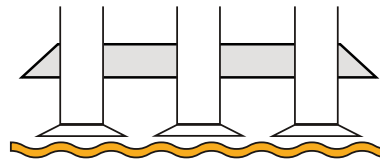

PLACING RACKS NEAR OR ON THE JOINT

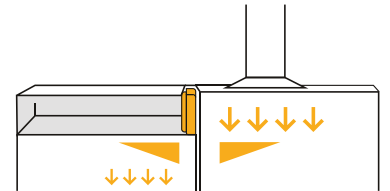


HIGHEST LOAD TRANSFER IN THE MARKET

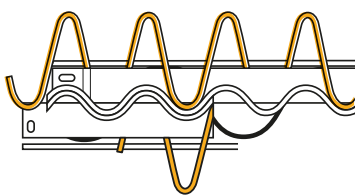


3D ANCHORAGE SYSTEM




CONTINUOUS LOAD TRANSFER SYSTEM (DOUBLE SLIDE EFFECT)

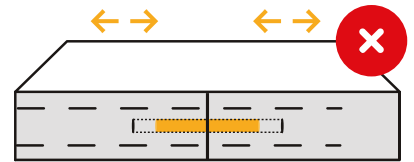

NO DOWEL TECHNOLOGY

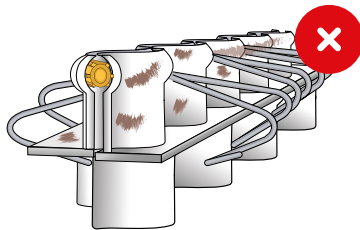


CORROSION FREE COATING ON TOP SINUS

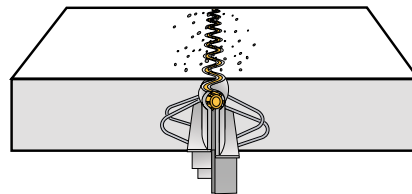

LASTING JOINT FUNCTION DUE TO RUBBER SEALING




POSSIBILITY FOR ON SITE SUPPORT




QUICK DELIVERIES DUE TO HIGH INHOUSE STOCK LEVEL



HIGH EFFICIENCY DUE TO INSTALLATION TOOL



CO2 REDUCTION

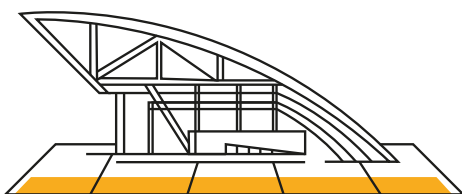

FUTURE PROOF BUILDING & TERRAIN



LESS REPAIR AND MAINTENANCE COSTS

